


Stopping Plugs (Tamperproof)

Flameproof Exd Dual Certified ATEX / IECEx

475 Tamperproof Stopping Plug

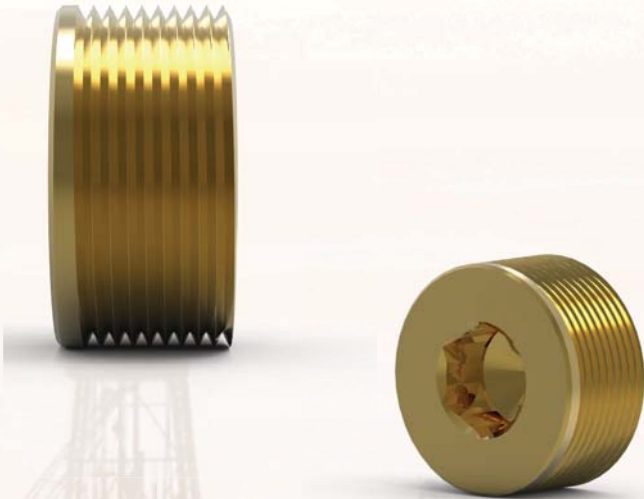

Certification Details

- Flameproof Exd I Mb, Exd IIC Gb, Extb IIIC Db, Ex IM2 / II 2GD.
- Certificate No's: Baseefa10ATEX0262X and IECEx BAS 10.0120X.
- GOST R certified.
- Operating Temperature Range -60°C to +160°C.
- Group I, II and III.

General Information

- The 475 is fitted from outside of the enclosure.
- Manufactured in Brass, Nickel Plated Brass, Steel, Nickel Plated Steel and Stainless Steel. (Aluminium for Group II use only).
- M16 to M75 as standard.
- Other thread options available on request, including BSPP, PG, NPT and ET.
- Metric entry threads are 1.5mm pitch as standard.
- Suitable for use in Zone 1, Zone 2, Zone 21, Zone 22 and mining applications.
- Construction and Test Standards: IEC/EN 60079-0, IEC/EN 60079-1 and IEC/EN 60079-31.
- Ingress Protection: IP66.
- Assembly Instruction Sheet: AI 404.

SELECTION TABLE


Thread Size	Thread Size (NPT)	Allen Key (mm)
M16	1/2" *	6 / 10 *
M20	3/4" or 1/2"	6
M25	1" or 3/4"	10
M32	1 1/4" or 1"	10
M40	1 1/2" or 1 1/4"	10
M50	2" or 1 1/2"	10
M63	2 1/2" or 2"	10
M75	3" or 2 1/2"	10

* smaller size if for M16 only.

Ordering Example:

Product	Thread Size	Material	Finish
475	M32	Brass	Nickel Plated

477 Tamperproof Stopping Plug

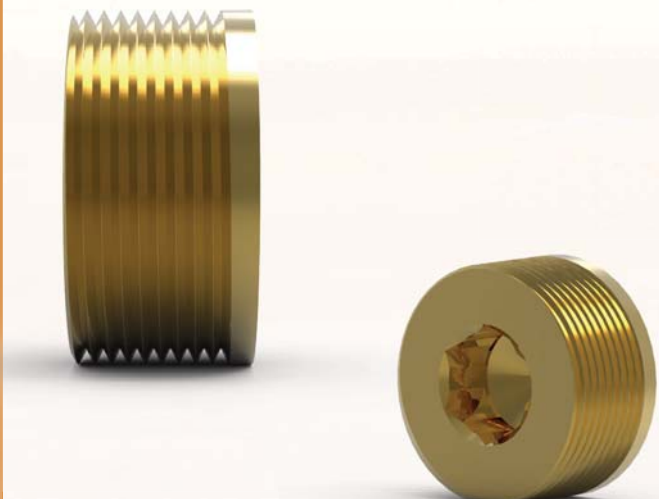

Certification Details

- Flameproof Exd IM2, Exd IIC Gb, Extb IIIC Db, Ex IM2 II 2GD.
- Certificate No's: Baseefa10ATEX0262X and IECEx BAS 10.0120X.
- GOST R certified.
- Operating Temperature Range -60°C to +160°C.
- Group I, II and III.

General Information

- The 477 is fitted from inside the enclosure.
- Manufactured in Brass, Nickel Plated Brass, Steel, Nickel Plated Steel and Stainless Steel. (Aluminium for Group II use only).
- M16 to M75 as standard.
- Other parallel thread options available on request, including BSPP, PG, NPT and ET.
- Metric entry threads are 1.5mm pitch as standard.
- Suitable for use in Zone 1, Zone 2, Zone 21, Zone 22 and mining applications.
- Construction and Test Standards: IEC/EN 60079-0, IEC/EN 60079-1 and IEC/EN 60079-31.
- Ingress Protection: IP66.
- Assembly Instruction Sheet: AI 404.

SELECTION TABLE

Thread Size	Thread Size (NPT)	Allen Key (mm)
M16	1/2" *	6 / 10 *
M20	3/4" or 1/2"	6
M25	1" or 3/4"	10
M32	1 1/4" or 1"	10
M40	1 1/2" or 1 1/4"	10
M50	2" or 1 1/2"	10
M63	2 1/2" or 2"	10
M75	3" or 2 1/2"	10

* smaller size if for M16 only.

Ordering Example:

Product	Thread Size	Material	Finish
477	M32	Brass	Nickel Plated